

Specifications

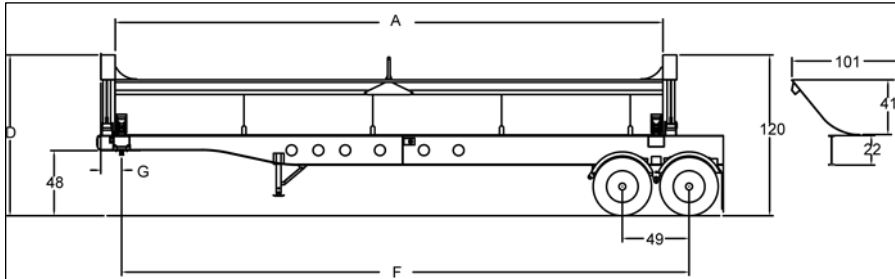


Photo may include options

The "SIDESTAR 2" High-Strength Side Dump Trailer

MODEL	Specifications				Dimensions						
	CODE	CAPACITY	HOIST	WT TOTAL	A	B	C	D	E	F	G
SD3424	CNO00	24	6 X 37	15,957	34'-0"		41"	120"		423"	18"
SD3424-3 AXLE	CPG00	24	6 X 37	16,084	34'-0"		41"	120"		472"	18"
SD3424 AIR	CNO98	24	6 X 37	14,741	34'-0"		41"	120"		423"	18"
SD3424-3-AIR	CNO99	24	6 X 37	16,547	34'-0"		41"	120"		472"	18"

GENERAL SPECIFICATIONS:

CHASSIS

Frame: Fabricated Hi-tensile Steel I-Beam 22" Main Frame, 11" Front Section, 42 1/2" Wide
 Suspension: 44,000 # 4 Spring - 3 Leaf
 Axles: (2) 102", 5/8 Wall, 5" Round, Common Inner/Outer Bearings
 Wheels: 8.25 x 24.5, 10 Hole Hub-Piloted Disc
 Tires: 11 x 24.5 Radial
 Hubs: 10 Hole Pilot Hub
 Brakes: Air 16 1/2" x 7" Outboard Cast Drum;
 ABS: 2S 1M
 Axle Spacing: 49" (50" with Single Point)
 Lights: 12 Volt Sealed Beam, Rubber Grommet
 Back-up Alarm: Yes

BODY

Type: Steel Parabolic style body for sand, gravel, aggregate, rock, rip-rap or demolition.
 Floor: 3/4" AR450
 Sides: 3/4" AR450
 Ends: 3/4" AR450
 Paint: One color urethane enamel over primed surface
 Longitudinal: none
 Top Rail: 11" x 6" x 3/16" Hi-Yield Fabricated Channel
 Mud Flaps: Rubber Rear Only
 Wiring: Sealed Harness Modular Plug In
 Landing Gear: Stiff Leg Standard
 King Pin Plate: 3/8"

Custom Options Available

*The company reserves the right under its product improvement policy to change construction or design and furnish equipment when so altered without reference to illustrations or specifications used herein. Dimensions included are nominal & may vary slightly in production.