

## Specifications

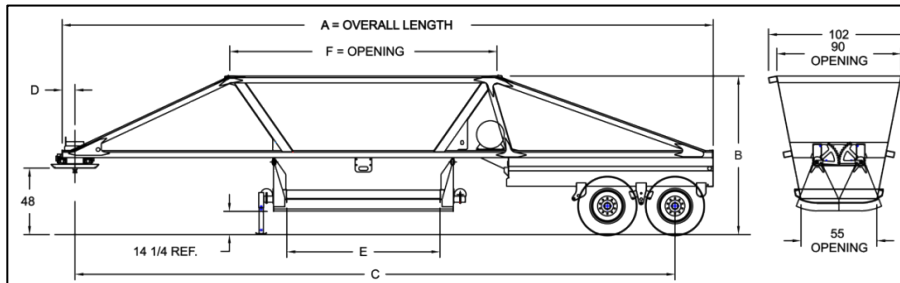


Photo may include options

## The "HaulStar" Steel Bottom Dump

MODEL	Specifications							Dimensions						
	CODE	CAPACITY	LENGTH	# GATES	GATE OPENING	SUSPENSION	WT TOTAL	A	B	C	D	E	F	G
JS4020S	DAN00	20	40'	1	55 x 111	4-Spring	13,154	40	114	435	9	111	193	78
JS4020-3	DEA00	20	40'	1	55 x 111	6-Spring	15,488	40	114	435	9	111	193	78
JS3520S	DED00	20	35'	1	55 x 111	4-Spring	13,628	35	114	375	9	111	193	68
JS24T4F	DEB00	14	26'	1	55 x 66	4-Spring	14,875	24	114	254	26*	66	148	51
JS4028-3	DRA00	28	40'	1	55 x 135	Intrax	18,446	40	126	446	9	135	234	
JS4028-3	DRA01	28	40'	1	55 x 135	6-Spring	18,114	40	126	446	9	135	234	

### GENERAL SPECIFICATIONS:

#### CHASSIS

Suspension: 50,000 # Single Point - 3 Leaf  
 Axles: (2) 102", 5/8 Wall, 5" Round, Common Inner/Outer Bearings  
 Wheels: 8.25 x 24.5, 10 Hole Hub-Piloted Disc  
 Tires: 11 x 24.5 Radial  
 Hubs: 10 Hole Pilot Hub  
 Brakes: Air 16 1/2" x 7" Outboard Cast Drum;  
 ABS: 2S 1M  
 Axle Spacing: 51"  
 Lights: 12 Volt Sealed Beam, Rubber Grommet  
 Back-up Alarm: Yes  
 Mud Flaps: Rubber Rear Only  
 Wiring: Sealed Harness Modular Plug In  
 King Pin Plate: 1/4" AR450 (Rocking/Breakaway)

#### BODY

Type: Steel Frameless Tandem Axle Semi-end Dump for rip rap or demolition  
 Tailgate: Top Hinged, Air Lift 3/16" AR450 Abrasion Resistance Steel  
 Body Shell: 3/4" AR450 Abrasion Resistance Steel  
 Front: 3/4" AR450 Abrasion Resistance Steel  
 Paint: One color urethane enamel over primed surface  
 Longitudinal: none  
 Top Rail: 6" x 6" x 1/4" Tubing  
 Rear Corner Posts: 3/16" HT50  
 Hoist Housing: None - Inverted Trunnion Mount Hoist

#### Common Options:

Tire Carriers  
 Front Fenders  
 Increased Capacity

### Custom Options Available

\*The company reserves the right under its product improvement policy to change construction or design and furnish equipment when so altered without reference to illustrations or specifications used herein. Dimensions included are nominal & may vary slightly in production.